
Metal Head[™]

PVC Transition Fittings







Design provides full flow with no restriction through the fitting

Copper tube surrounds and protects PVC insert, for more durable connections vs. other transition fittings

COMPATIBLE

Fittings conform to ASTM F 1970, and are designed for use with PVC Sch. 40 pipe and fittings conforming to ASTM D 2466

• QUALITY

All fittings are 100% production tested for leak proof connections




indicated models comply with CA lead plumbing laws



Male Sweat Adapter

- Perfect for water service connections
- Press Fitting compatible



Do Not Cut This Fitting Cutting this fitting voids warranty

Do Not allow PVC portion of fitting to be heated. Do Not exceed 140°F. Excessive heat can damage the PVC insert and internal o-ring.

Whenever possible, solder with PVC socket facing downward. Plug PVC socket to prevent chimney effect. Apply torch to female fitting - not the adapter

Use a commercial heat blocking agent between solder joint and PVC joint, and perform solder joints at min. distance of:

distance of: 10" from ¾" PVC socket 18" from 1" & 1¼" PVC socket 20" from 1½" PVC socket 22" from 2" PVC socket A perfect fitting to transition from a PVC service line to copper. Solder with PVC insert facing downward, apply torch to female fitting, and use a heat blocking agent to prevent damage.

	Item No.	Description	Length	Pkg	Min. Qty.	Case Qty.	List Price
	643-P311	3/4" PVC x 3/4" MSWT	11"	В	50	50	9.98 EA
	643-P418	1" PVC x 1" MSWT	18"	В	25	25	18.99 ea
	643-P518	11/4" PVC x 11/4" MSWT	18"	В	1	10	37.09 ea
Ano	643-P620	11/2" PVC x 11/2" MSWT	20"	В	1	10	50.09 ea
	643-P722	2" PVC x 2" MSWT	22"	В	1	10	74.79 ea

Brass Ball Valves

• Full-port ball valve with chrome-plated ball and blowout proof stem





Use in irrigation or sprinkler systems as a more durable alternative to plastic shut-off valves.

	Item No.	Descripti	on Pkg	Min. Qty.	Case Qty.	List Price
	648-P3FP	3⁄4" PVC	В	10	10	25.21 EA
	648-P4FP	1" PVC	В	10	10	43.40 EA
	648-P5FP	11/4" PVC	В	5	5	70.49 ea
_	648-P6FP	11/2" PVC	В	1	1	98.37 ea
	648-P7FP	2" PVC	В	1	1	152.63 ea

PEX Adapter




• Use for fast, easy and solid transitions from PVC to PEX

F1807 645X23P 34" PVC x ½" PEX B 50 50 7.05 EA 645X3P 34" PVC x 34" PEX B 50 50 7.49 EA
645X3P % PVC % % PEX B 50 50 7.49 EA
645X43P 3/4" PVC x 1" PEX B 20 20 11.87 EA
645X34P 1" PVC x ³ ⁄⁄ ₄ " PEX B 20 20 1180 €4
LEAD 645X4P 1" PVC x 1" PEX B 20 20 12.38 EA
F2080
645A3P 3/4" PVC x 3/4" PEX B 50 50 10.59 EA
645A4P 1" PVC x 1" PEX B 20 20 18.52 EA
F1960
645WG3P 3/4" PVC x 3/4" PEX B 50 50 9.82 EA
NO Gate G
Makes fast, easy transitions F2434 - FAILSAFE
from PVC service lines to PEX 645X54P 1 ¹ / ₄ " PVC x 1" PEX B 10 10 47.50 EA
in-house piping systems. 645X5P 1¼" PVC x 1¼" PEX B 10 10 50.90 EA

Thread Adapter

• Transition easily from PVC service lines to threaded adapter for CPVC, copper, or PEX supply systems

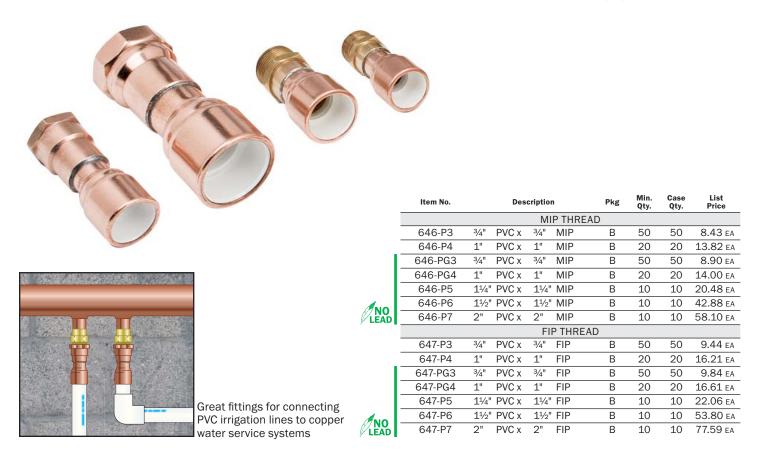

Patriot PEX Metal Head[™] **Transition Fittings CPVC Transition Fittings** Sioux Chief has the widest and most complete line of transition fittings for PEX and CPVC in the industry. All Sioux Chief products, including Patriot $\mathsf{PEX}^{\mathsf{M}}$ and Metal Head[™] transition fittings are covered by a lifetime warranty. NO Standard & No Lead NO Standard & No Lead AD models available AD models available Stub Out Elbows Water Heater Connectors Water Heater Stub Out Connectors Elbows Tub/Shower Connectors Tub/Shower Connectors Water Hammer Arresters Thread Adapters Sweat **PEX Adapters** Adapters Thread Adapters Drop Ear Elbows Couplings Valves Elbows Crimp Rings Sweat Adapters

DISTRIBUTED BY

24110 South Peculiar Drive Peculiar, Missouri 64078 tel: 1-800-821-3944 fax: 1-800-758-5950 www.siouxchief.com

